



## Manifold with valves

Geothermal distribution manifold with valves.

### Features

#### Materials

- High density polyethylene PE100.
- CW612N brass inlet and control outlet.

#### Technical data

**PN 10 bar**

**SDR 11**

### Applications




### Standards

---

### Certifications

---

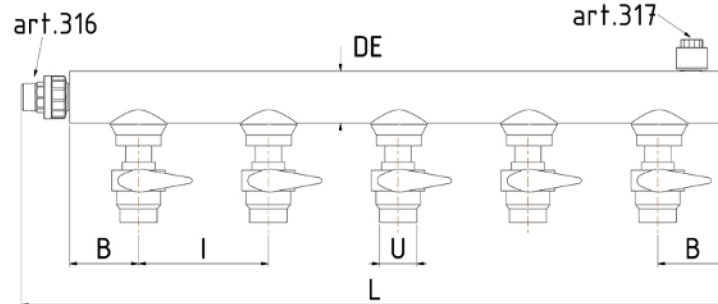

### Dimensional

Cod	DE (mm)	L (mm)	I (mm)	B (mm)	U (inch)	N outlets
3150063020	63	440	120	125	1"	2
3150063030	63	560	120	125	1"	3
3150063040	63	680	120	125	1"	4
3150063050	63	800	120	125	1"	5
3150063060	63	920	120	125	1"	6
3150063070	63	1040	120	125	1"	7
3150063080	63	1160	120	125	1"	8
3150063090	63	1280	120	125	1"	9
3150063100	63	1400	120	125	1"	10
3150063110	63	1520	120	125	1"	11
3150063120	63	1640	120	125	1"	12
3150110020	110	440	120	125	1 1/4"	2
3150110030	110	560	120	125	1 1/4"	3
3150110040	110	680	120	125	1 1/4"	4
3150110050	110	800	120	125	1 1/4"	5
3150110060	110	920	120	125	1 1/4"	6
3150110070	110	1040	120	125	1 1/4"	7
3150110080	110	1160	120	125	1 1/4"	8
3150110090	110	1280	120	125	1 1/4"	9
3150110100	110	1400	120	125	1 1/4"	10
3150110110	110	1520	120	125	1 1/4"	11
3150110120	110	1640	120	125	1 1/4"	12
3151063022	63	440	160	105	1"	2
3151063032	63	600	160	105	1"	3
3151063042	63	760	160	105	1"	4
3151063052	63	920	160	105	1"	5
3151063062	63	1080	160	105	1"	6
3151063072	63	1240	160	105	1"	7
3151063082	63	1400	160	105	1"	8
3151063092	63	1560	160	105	1"	9

3151063102	63	1720	160	105	1"	10
3151063112	63	1880	160	105	1"	11
3151063122	63	2040	160	105	1"	12
3152110022	110	440	160	105	1 1/4"	2
3152110032	110	600	160	105	1 1/4"	3
3152110042	110	760	160	105	1 1/4"	4
3152110052	110	920	160	105	1 1/4"	5
3152110062	110	1080	160	105	1 1/4"	6
3152110072	110	1240	160	105	1 1/4"	7
3152110082	110	1400	160	105	1 1/4"	8
3152110092	110	1560	160	105	1 1/4"	9
3152110102	110	1720	160	105	1 1/4"	10
3152110112	110	1880	160	105	1 1/4"	11
3152110122	110	2040	160	105	1 1/4"	12

- Brass lateral inlet and control outlet with transition connection according to UNI 9736, with full bore passage.
- Polyethylene dimensions according to UNI EN 12201-3, standard thickness SDR11.
- Metal threaded fittings according to UNI EN 10226-1 (exISO7/1).
- Monolithic body obtained through injection moulding.
- Socket-welding carried out by qualified staff at the workshop.
- Fitted with internal safety o-ring.
- Fitted with PVC ball valves.